


Avanti

UPVC HANDLES

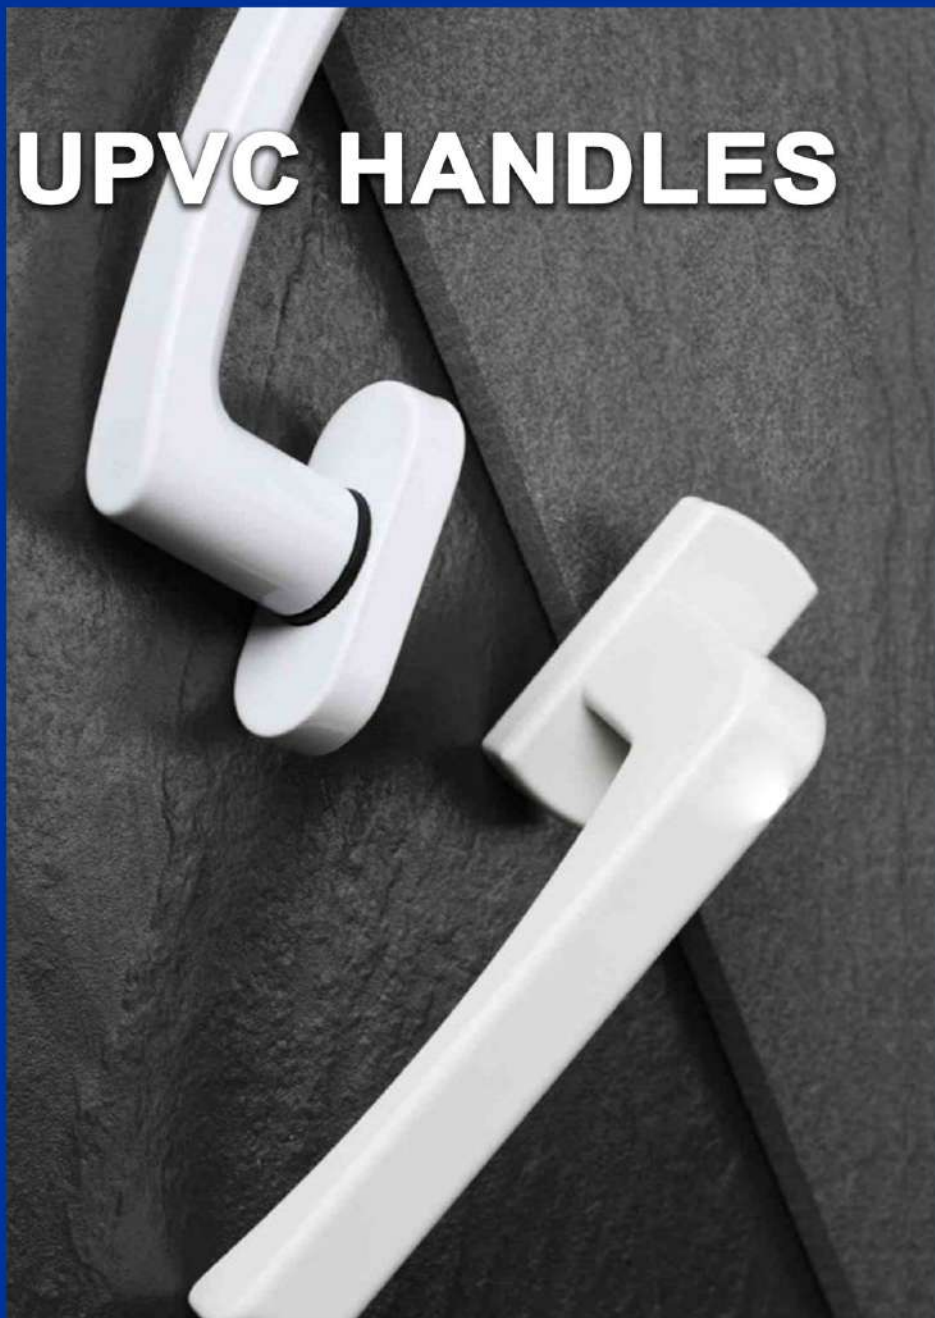

Avanti Hardware Private Limited

ADDRESS B-1 MMTC / STC Colony, LSC Navjivan Vihar, NEW DELHI - 110017 (INDIA)

PHONE NO. +91 11 43575156 , 26691550


MOBILE NO. +91 9810021354


EMAIL kulin@skggroup.com

WEBSITE www.avantihardware.co

S.NO**TABLE OF CONTENT****PAGE NO.**

1.	HANDLES	01 - 12
2.	ESPANGNOLETTES	13 - 19
3.	FRICTION	20 - 23
4.	HINGES	24
5.	CYLINDERS	25
6.	ROLLERS	26 - 28
7.	ACCESSORIES	29 - 34
8.	TILT & TURN WINDOW	35 - 36

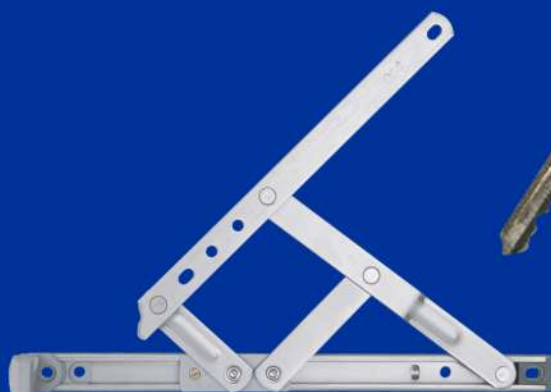


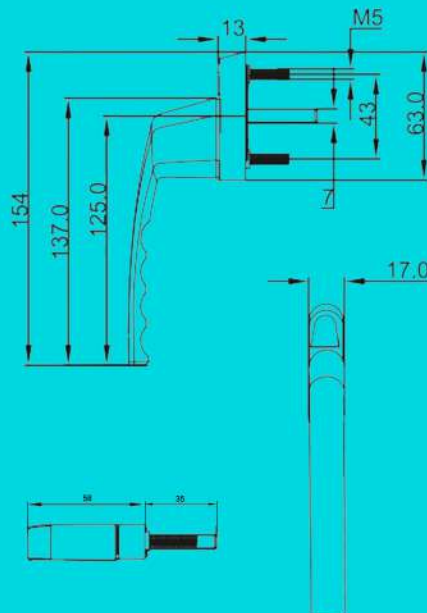

Espagnolette Handle (Multi Point Locking) Code : EHMPL01

Feature


- Compatible with a wide range of profile
- Heavy duty handle
- 35 mm long spindle
- Handle and espagnolette compatibility is evident
- Key Material - Zamak
- Enables locking at multiple places
- Enhanced security, better weather sealing

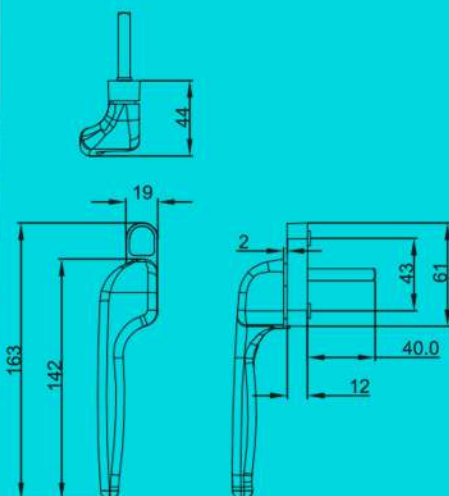

Espagnolette Offset Handle (Multi Point Locking) Code : EOHMPL02

Feature


- Curved offset handle grip
- Increased gap between outer and handle grip
- 40 mm long spindle
- Suitable for deep profiles
- Enables locking at multiple places
- Enhanced security, better weather sealing

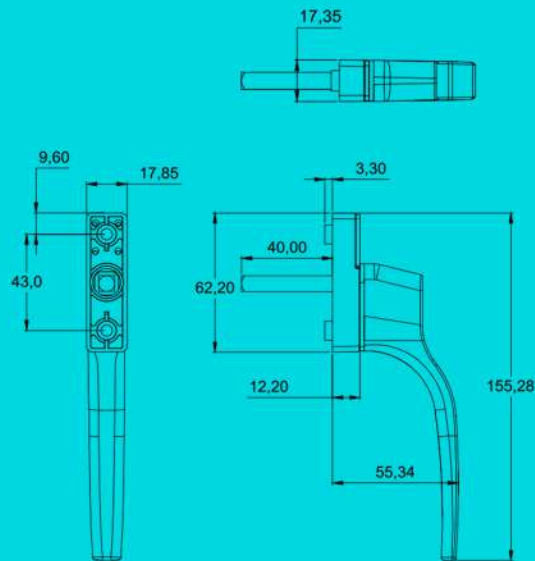

Espagnolette Handle (Multi Point Locking) Code : EHMPL03

Feature

- Compatible with a wide range of profile
- Light duty Handle
- 40mm Long Spindle. Suitable for deep profiles
- Enables locking at multiple places
- Enhanced security and better weather sealing
- Key Material Aluminium & Zinc

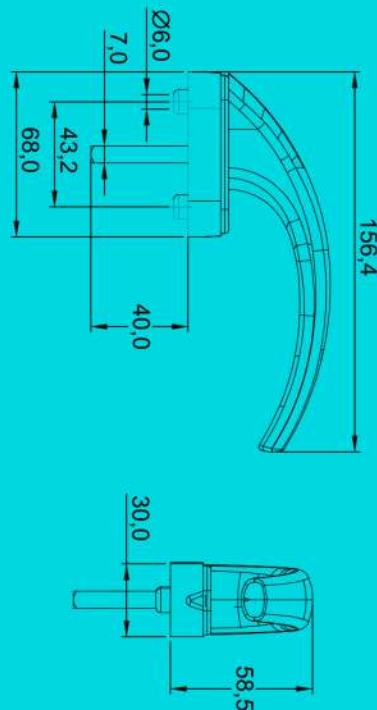

Espagnolette Handle (Multi Point Locking) Code : EHMPL04

Feature


- Compatible with a wide range of profile
- Light duty Handle
- 40mm Long Spindle. Suitable for deep profiles
- Enables locking at multiple places
- Enhanced security and better weather sealing
- Key Material Aluminium



**Cockspur Handle
(Single Point Locking)
Code : CHSPL(R,L)05**

Feature


- Slot-free installation
- Face fixed easy installation
- Compatible with most profiles
- Supplied with packers to fit all profile system
- Available in left and right options

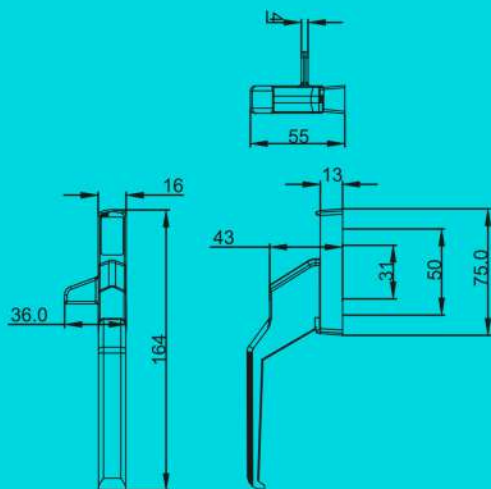

**Cockspur Handle
(Single Point Locking)
Code : CHSPL(R,L)06**


Feature

- Slot-free installation
- Face fixed easy installation
- Compatible with most profiles
- Supplied with packers to fit all profile system
- Available in left and right options

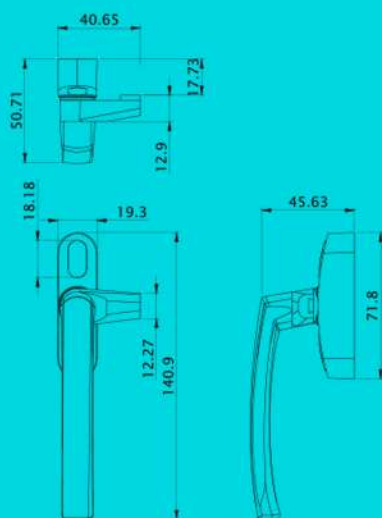



**Espagnolette Handle
with key
(Multi Point Locking)
Code : EHWKMPL07**

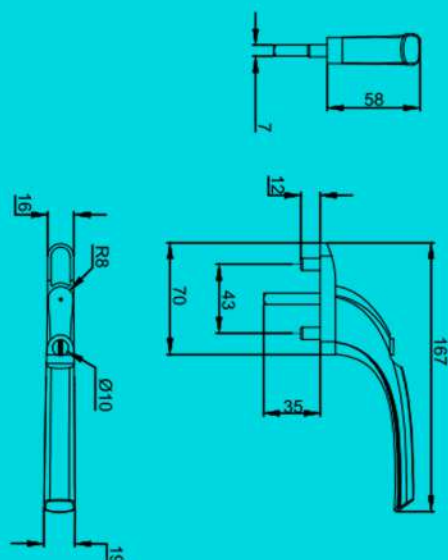


Feature

- Compatible with most profiles
- 35 mm long Spindle
- With key (all keys are the same)
- Customised Key, as per requirement
- Multi point locking




**Allen Key Handle
Code : AKH08**

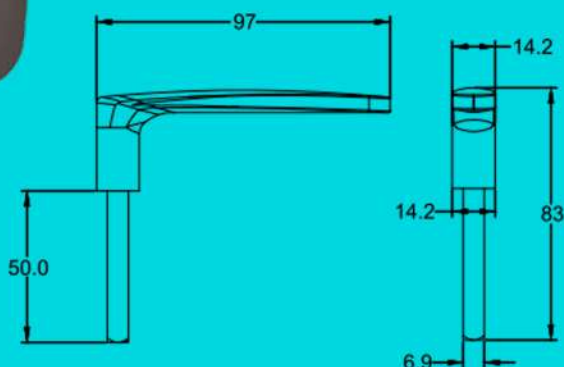

Feature


- Compatible with a wide range of profiles
- Smooth operation
- Multiple point locking
- Enhanced security, better weather sealing

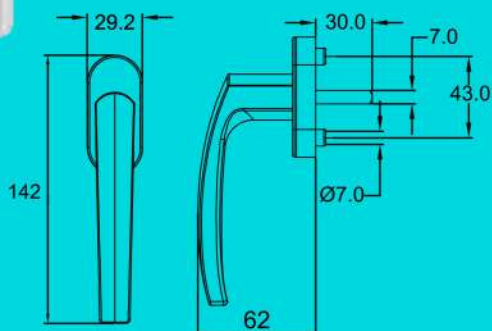

**Espagnolette Double Handle
(Multi Point Locking)
Code : EDHMPL09**

Feature



- Robust spring-loaded gearing
- 115mm long spindle
- Multi place locking
- Enhanced security, better weather sealing

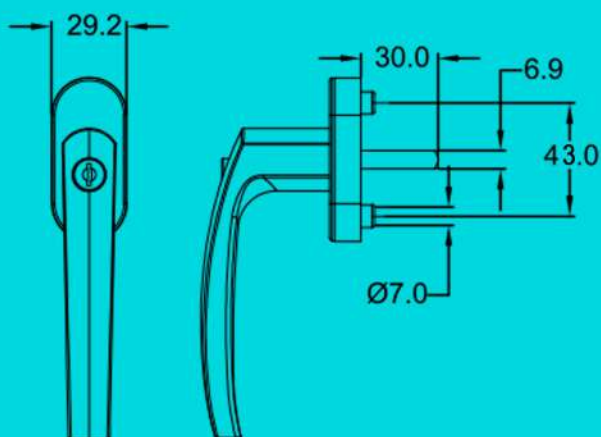

**Espagnolette Double Handle
With Key
(Multi Point Locking)
Code : EDHMPLWK10**

Feature



- Robust spring-loaded gearing
- 115mm long spindle
- One side key is available
- Multi place locking
- Enhanced security, better weather sealing

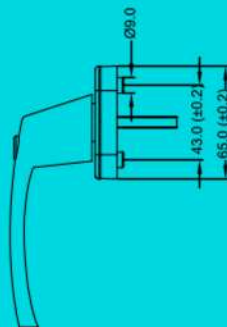

Espagnolette Handle With Key (Multi Point Locking) Code : EHMPLWK11

Feature


- Sliding espag handle with key option
- Heavy duty handle
- Handle and espagnolette compatibility is evident
- Key materials - Aluminium and Zinc
- Metal screw cap
- Multi point locking
- Enhanced security, better weather sealing
- 30 mm long spindle

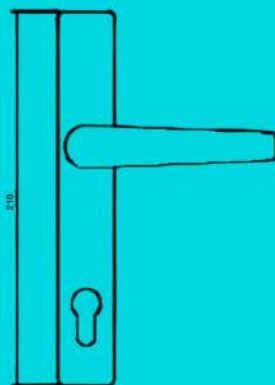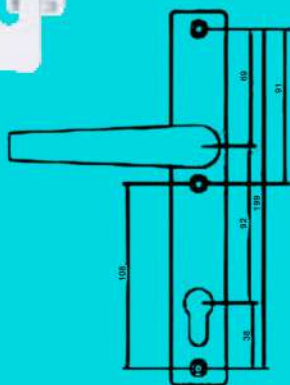

Espagnolette Double Handle (Multi Point Locking) With Integrated Lock Code : EDHMPWIL12

Feature


- Robust spring-loaded gearing
- 85/92mm c/c distance between spindle & cylinder centre
- Suitable for all uPVC door profiles
- Multi place integrated locking
- Enhanced security and better weather sealing

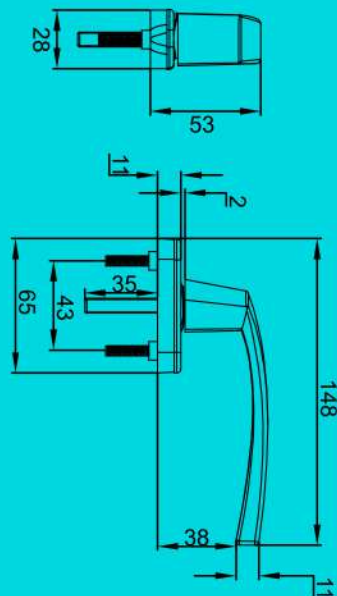

Espagnolette Handle with Metal Screw Cap (Multi Point Locking) **Code : EHWMSC13**

Feature


- Compatible with a wide range of profile
- Heavy duty handle
- Handle and espagnolette compatibility is evident.
- Key materials - Aluminium and Zinc
- Metal screw cap
- Multi point locking
- Enhanced security, better weather sealing
- 35 mm long spindle

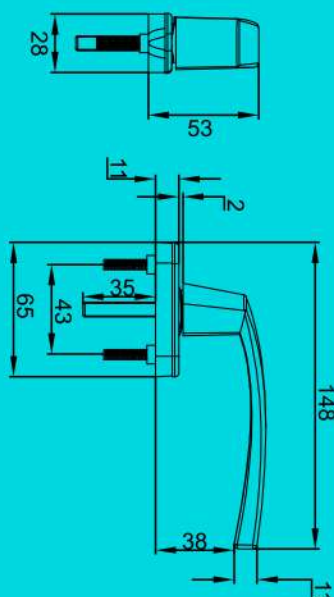

Espagnolette Handle with Plastic Screw Cap (Multi Point Locking) **Code : EHWPSC14**

Feature


- Compatible with a wide range of profile
- Light duty handle
- Handle and espagnolette compatibility is evident
- Key material - Aluminium
- Enhanced security, better weather sealing
- Multi point locking
- 35 mm long spindle

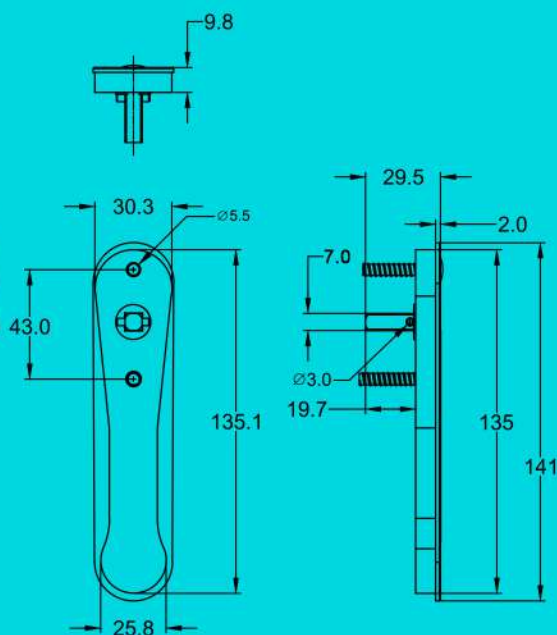

Pop Up Espagnolette Handle (Multi Point Locking) Code : PUEHMPL15

Feature


- Sliding flush type espag handle
- Handle and espagnolette compatibility is evident
- Multi point locking
- Enhanced security, better weather sealing
- 30 mm long spindle

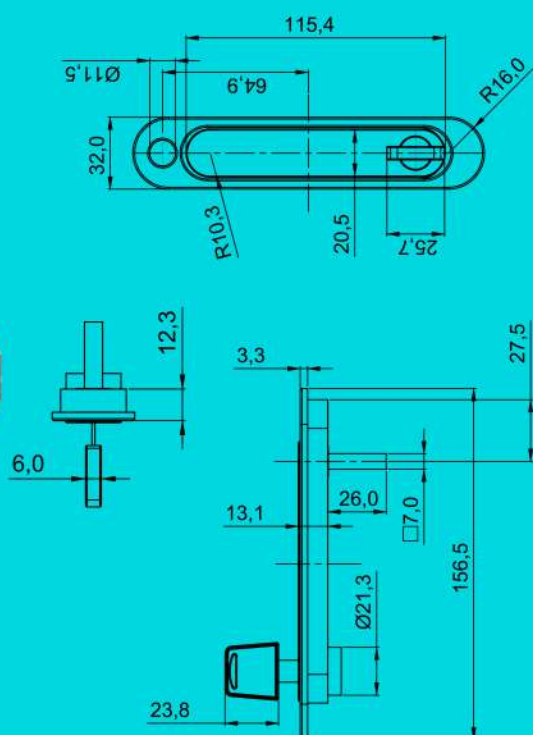

Pop Up Espagnolette Handle With Key (Multi Point Locking) Code : PUEHMPL16

Feature


- Sliding flush type espag handle
- Handle and espagnolette compatibility is evident
- Multi point locking Enhanced security, better weather sealing
- Handle with key
- Key material Zamac

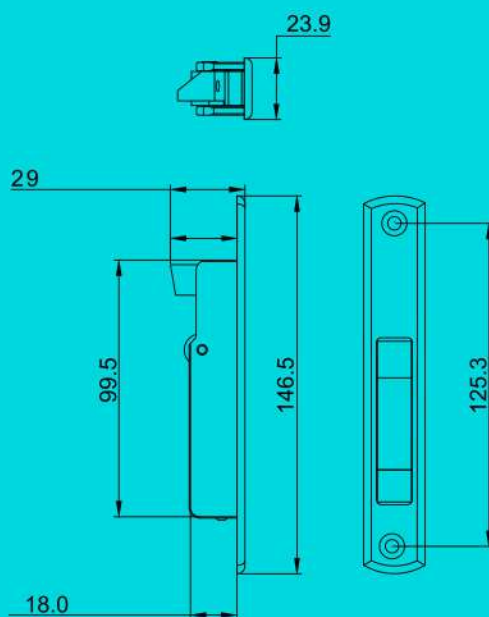

**Touch Lock Without Hook
(Single Point Locking)
(Heavy Duty)**
Code : TLWHHD(L,R)17

Feature


- Single point flush type sliding handle
- Easy to operate
- Available in left and right option
- Made of high quality zinc diecasting
- Heavy Duty

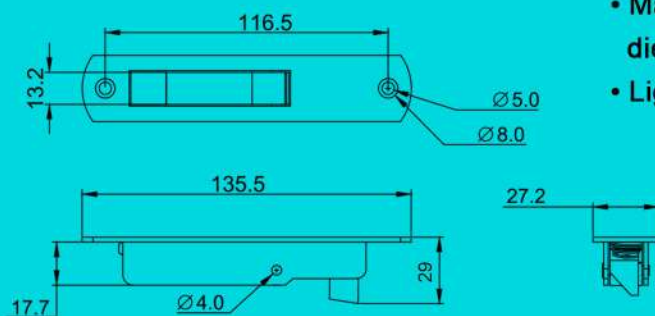

**Touch Look Without Hook
(Single Point Locking)
(Light Duty)**
Code : TLWLHD(L,R)18

Feature


- Single point flush type sliding handle
- Easy to operate
- Available in left and right option
- Made of high-quality aluminium diecasting
- Light Duty

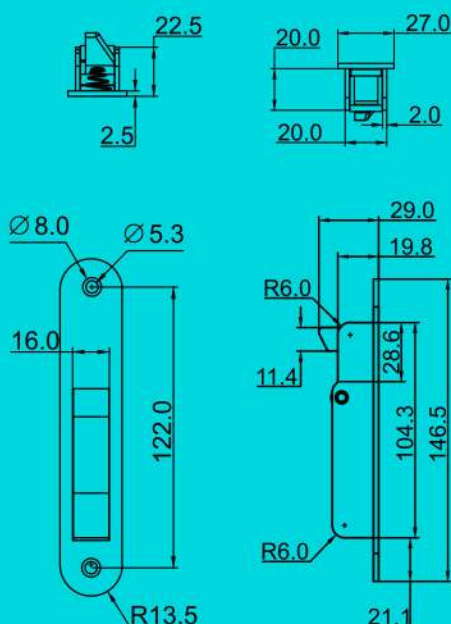

Touch Lock w/o Hook (Light Duty) with Wider Touch Base Code : TLLDWTB19

Feature


- Single point flush type sliding handle
- Easy to operate
- Available in left and right option
- Made of high quality aluminium diecasting
- Light duty
- Provides the wider touch base for the finger

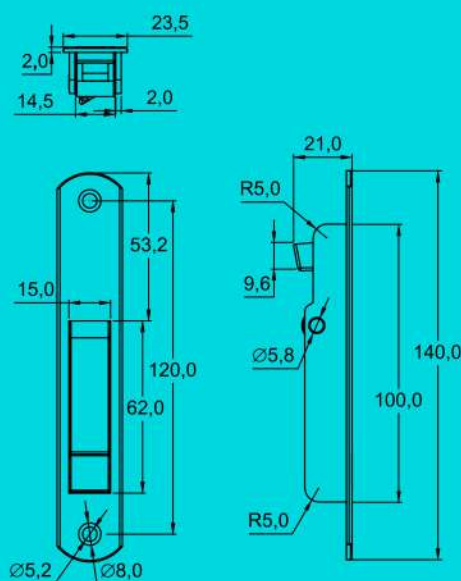

Touch Lock Slim Type w/o Hook (Light Duty) Code : TLSTLD20

Feature

- Single point flush type sliding handle
- Easy to operate
- Available in left and right option
- Made of high quality aluminium diecasting
- Light duty
- Suitable especially for slim sliding series

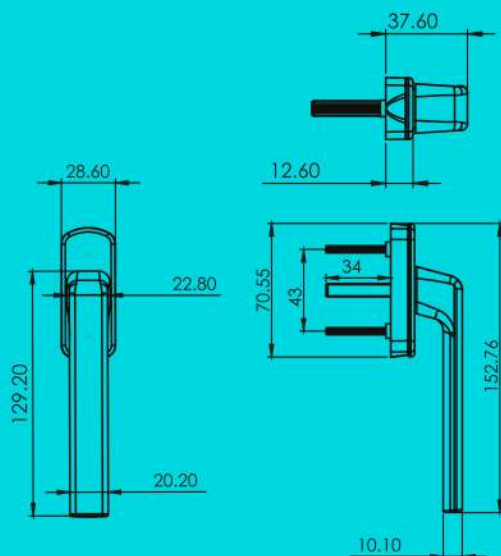


Short Neck Handle (Specially for Mesh Shutters)

Code : SNHSMS21

Feature

- Compatible With a wide range of profiles
- Designed for window and door with mesh panels
- Handle and espagnolette compatibility is evident
- Key material - Aluminium
- Enhanced security, better weather sealing
- Multi point locking
- 34mm spindle length

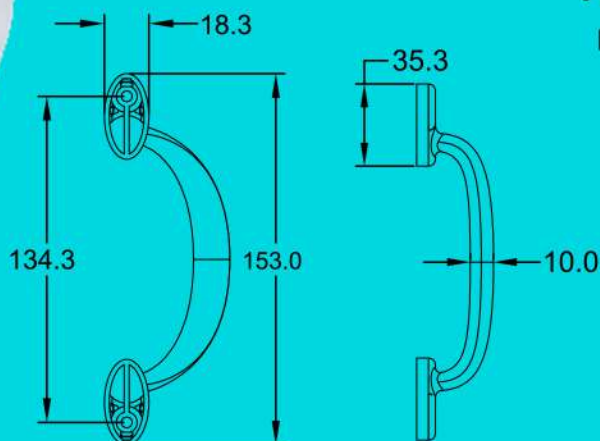


C Handle

Code : CHMS22

Feature

- Especially designed for systems where both mesh and main shutter are required

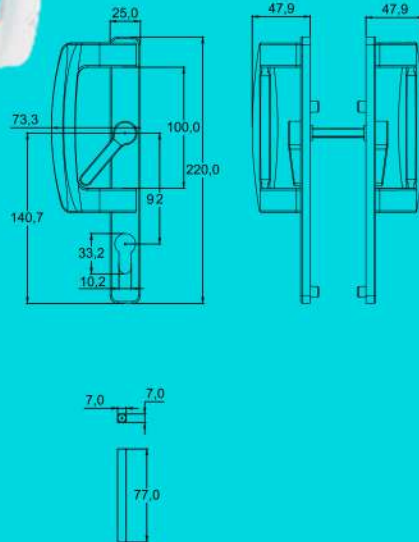


D Handle With Cylinder & Both Side Knob

Code : DHWCBK23

Feature

- Robust spring loaded gearing
- 92mm c/c distance between Spindle & Cylinder Centre
- Suitable for all UPVC sliding door profiles
- Multi place integrated locking
- Enhanced security and better weather sealing
- Key material Aluminium
- 77 mm long spindle

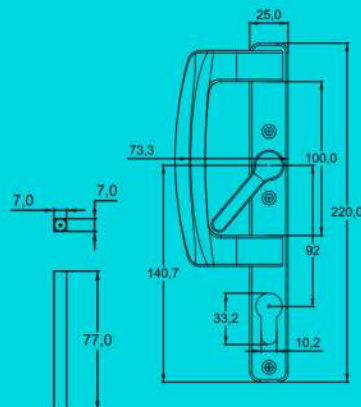


D Handle With Dummy Handle

Code : DHWDH24

Feature


- Robust spring loaded gearing
- 92mm c/c distance between Spindle & Cylinder Centre
- Suitable for all UPVC sliding door profiles
- Multi place integrated locking
- Enhanced security and better weather sealing
- Key material Aluminium
- 77 mm long spindle

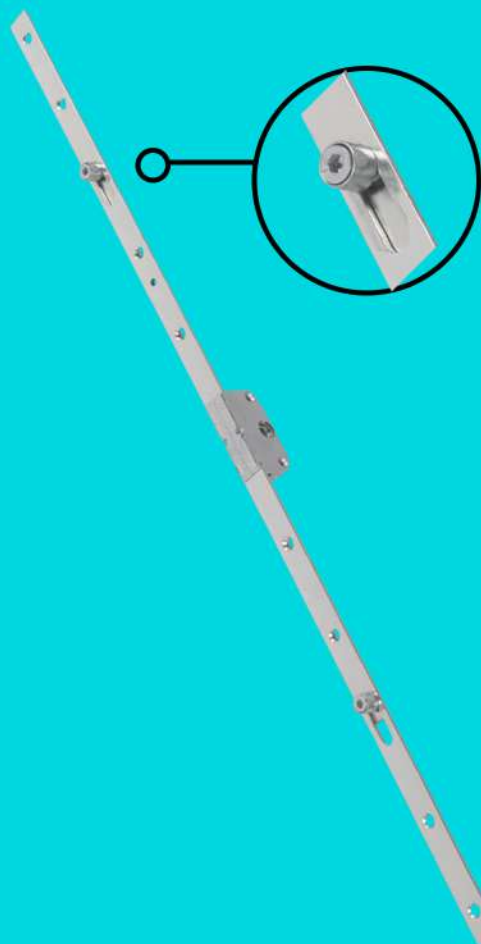

Espagnolette Euro Type (Roller Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 22mm, length 600 -1800mm
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Tested for 500 hours - Salt Spray Test

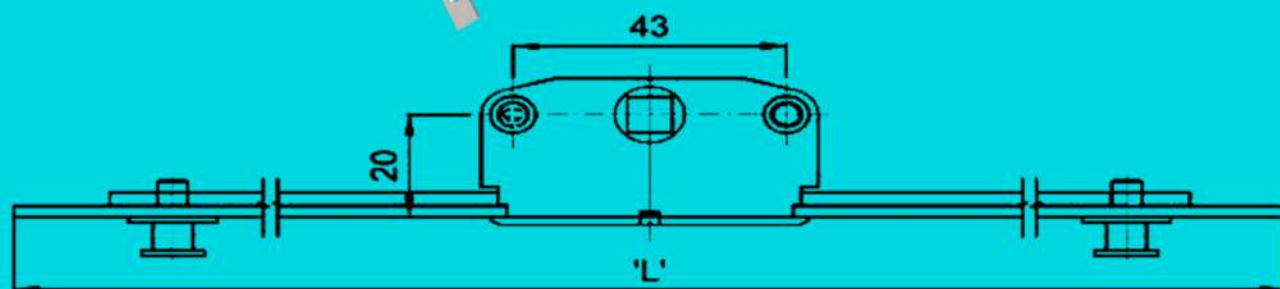


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
EETRC25	Casement Window	Round Pin	600	22	2
EETRC26	Casement Window	Round Pin	800	22	2
EETRC27	Casement Window	Round Pin	1000	22	3
EETRC28	Casement Window	Round Pin	1200	22	3
EETRC29	Casement Window	Round Pin	1600	22	3
EETRC30	Casement Window	Round Pin	1800	22	4




Espagnolette British Type (Mushroom Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 20mm, length 800 -1200mm
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Tested for 500 hours - Salt Spray Test

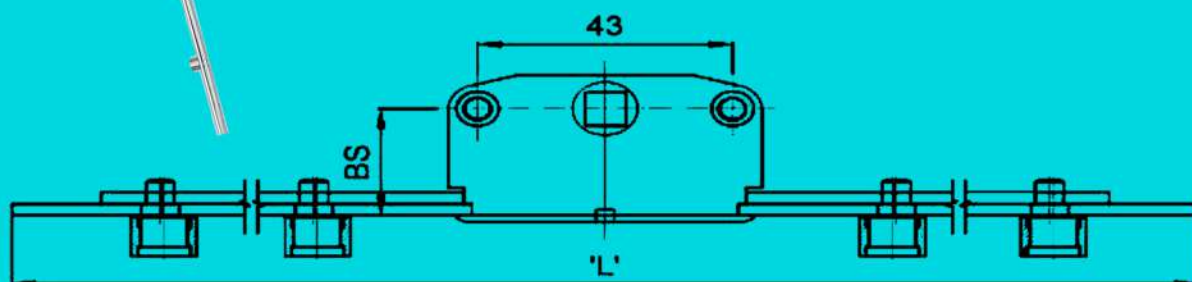


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
EBTMPCW31	Casement Window	Mushroom Pin	800	20	2
EBTMPCW32	Casement Window	Mushroom Pin	1000	20	3
EBTMPCW33	Casement Window	Mushroom Pin	1200	20	3

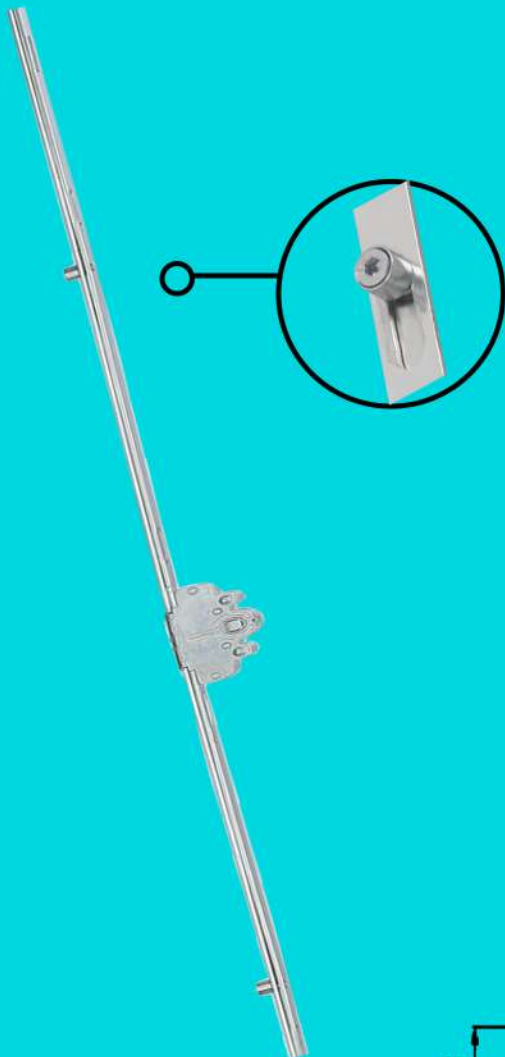

Espagnolette EuroType (Roller Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 30 -35 mm,length 1800 -2100mm
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Tested for 500 hours - Salt Spray Test

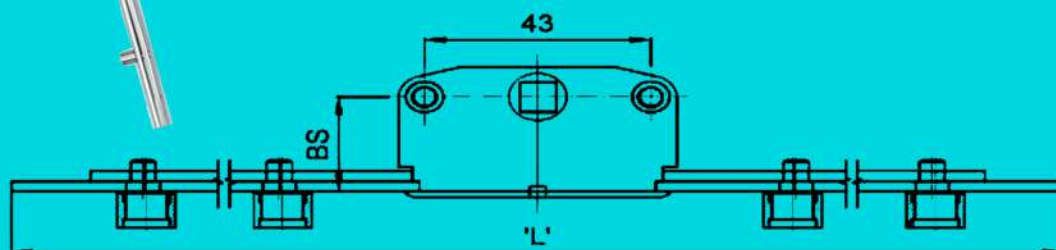


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
EETCDRP34	Casement Door	Round Pin	1800	30	4
EETCDRP35	Casement Door	Round Pin	1800	35	4
EETCDRP36	Casement Door	Round Pin	2000	35	4


Espagnolette Euro Type (Roller Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 35mm, length 1800 -2100 mm, Lockable option.
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Tested for 500 hours - Salt Spray Test

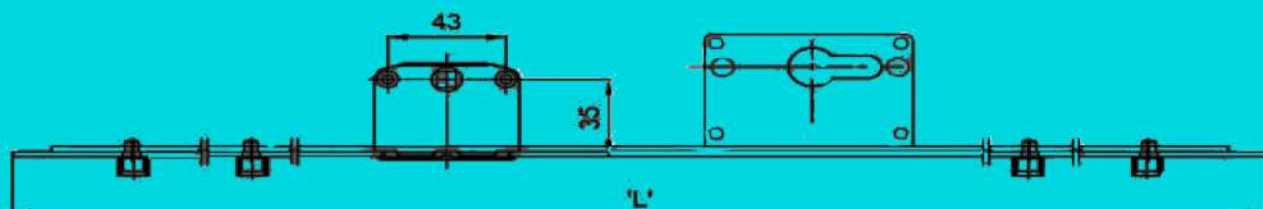


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
EETCDRP37	Casement Door	Round Pin	1800	35	4
EETCDRP38	Casement Door	Round Pin	2000	35	4
EETCDRP39	Casement Door	Round Pin	2100	35	4

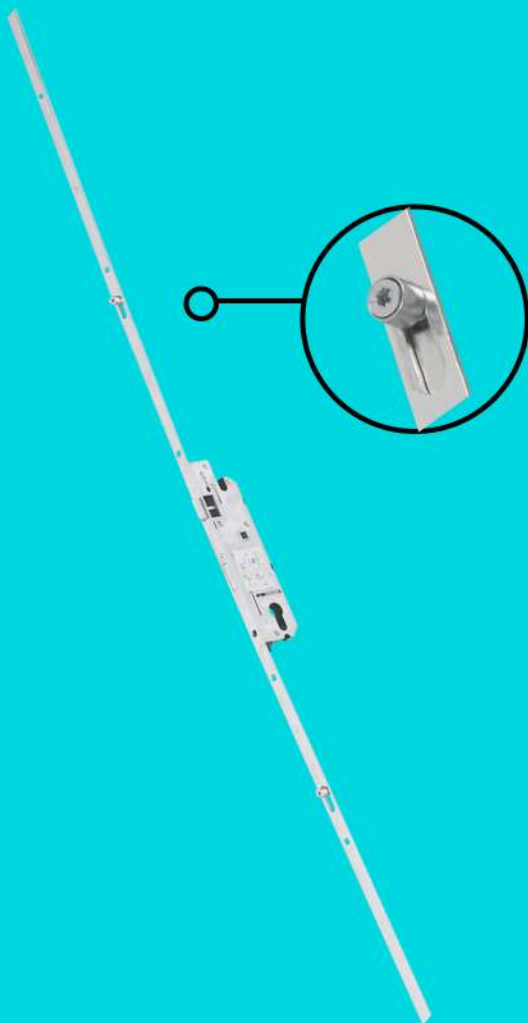

Espagnolette Integrated (Roller Cams)

Feature

- Compatible with a wide range of profile
- Unique 8mm Spindle slot, Backset 25-35mm, length 2000mm with Integrated Locking facility
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Central striker included with the espag
- Tested for 500 hours - Salt Spray Test

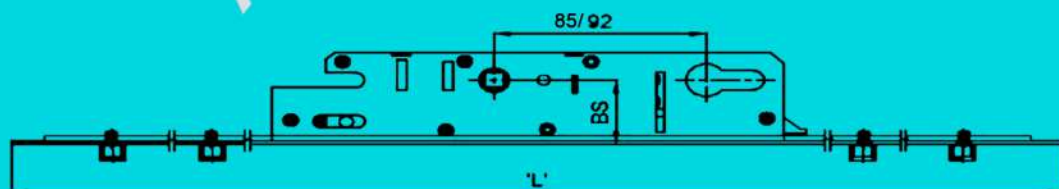


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
EICDRP40	Casement Door	Round Pin	2000	35	4
EICDRP41	Casement Door	Round Pin	2000	25	4



Espagnolette (Zamac Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 7.5mm, length 800-1800mm
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Higher security level than standard sliding pin
- Tested for 500 hours - Salt Spray Test

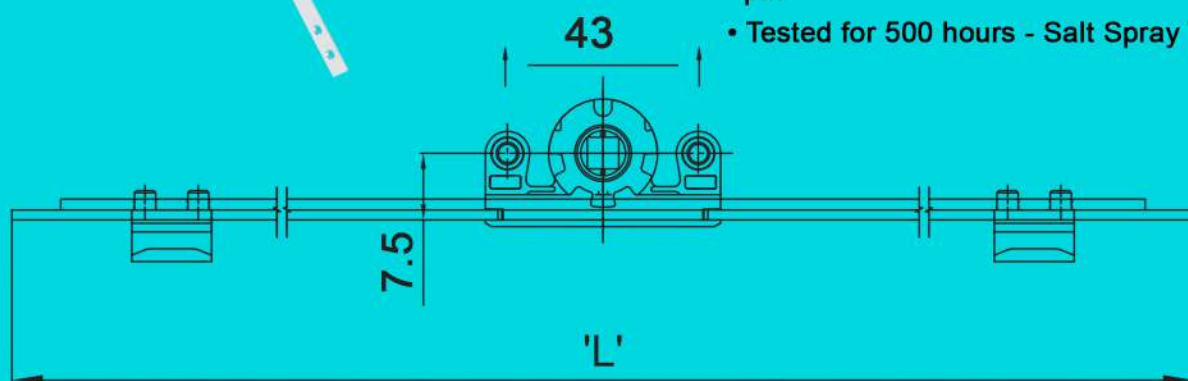


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
ESWZP42	Sliding Window	Zamac Pin	800	7.5	2
ESWZP43	Sliding Window	Zamac Pin	1000	7.5	2
ESWZP44	Sliding Window	Zamac Pin	1200	7.5	2
ESWZP45	Sliding Window	Zamac Pin	1600	7.5	3
ESWZP46	Sliding Window	Zamac Pin	1800	7.5	3



Espagnolette (Zamac Cams)

Feature

- Compatible with a wide range of profile
- Unique 7mm Spindle slot, Backset 15mm, length 1600- 2000mm
- Works impressively under heavy gasket pressure
- Multi point locking
- Enhanced security, better weather and noise sealing
- Zinc Plated
- Higher security level than standard sliding pin
- Tested for 500 hours - Salt Spray Test

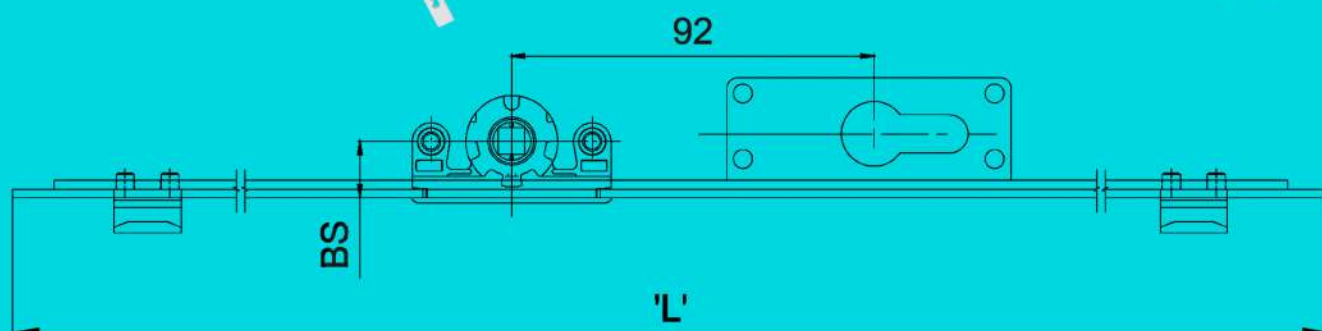


Code	Suitable For	Locking Point Type	L'Length of Espagg (mm)	BackSet (mm)	Number of Locking Point
ESDZP47	Sliding Door	Zamac Pin	1600	15	3
ESDZP48	Sliding Door	Zamac Pin	1800	15	4
ESDZP49	Sliding Door	Zamac Pin	2000	15	4

13 mm Stack Height Friction Hinges. Light Duty

Feature

- Available in higher corrosion-resistant SS304/SS430 Austenitic Stainless Steel
- Preferred for Aluminium/UPVC/Timber windows
- Application - Light duty, Side hung and top hung
- Stack height -13mm

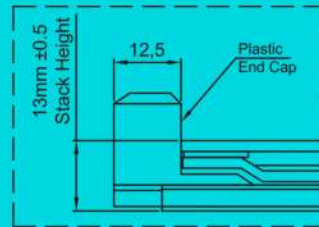


Code	Window Type	Applicaton	Steel Grade	Length(A) (inch/mm)	Max Vent Height(mm)
FHLDTH50(10")	Top Hung	Aluminium / uPVC / Timber Window	SS304	250.0	450
FHLDTH51(12")	Top Hung	Aluminium / uPVC / Timber Window	SS304	304.0	550
FHLDTH52(16")	Top Hung	Aluminium / uPVC / Timber Window	SS304	397.4	750
FHLDTH53(8")	Side Hung	Aluminium / uPVC / Timber Window	SS304	200.0	—
FHLDTH54(10")	Side Hung	Aluminium / uPVC / Timber Window	SS304	250.0	—
FHLDTH55(12")	Side Hung	Aluminium / uPVC / Timber Window	SS304	304.0	—
FHLDTH56(16")	Side Hung	Aluminium / uPVC / Timber Window	SS304	407.0	—
FHLDTH57(10")	Side Hung	Aluminium / uPVC / Timber Window	SS430#	250.0	1200
FHLDTH58(12")	Side Hung	Aluminium / uPVC / Timber Window	SS430#	304.0	1200
FHLDTH59(16")	Side Hung	Aluminium / uPVC / Timber Window	SS430#	407.0	1200

Max Vent Width(mm)	Max Vent Wight(kg)	Opening Angle*	Stack Ht. (mm)
—	16	58	13+-0.5
—	20	65	13+-0.5
—	24	52	13+-0.5
350	12	64	13+-0.5
500	16	88	13+-0.5
600	19	88	13+-0.5
700	24	88	13+-0.5
500	16	88	13+-0.5
600	19	88	13+-0.5
700	24	88	13+-0.5



- Available in higher corrosion-resistant SS304 Austenitic Stainless Steel
- Preferred for Aluminium/uPVC Timber windows
- Application - Light duty, Side hung
- Stack height -16mm

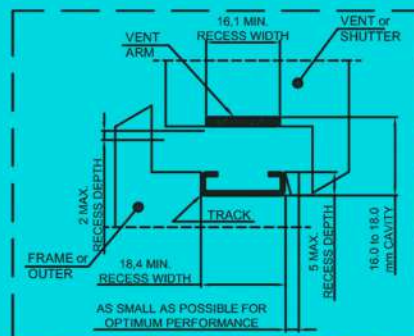


Max Vent Width(mm)	Max Vent Weight(mm)	Opening Angle	Stack Ht. (mm)
400	14	88	16+-0.5
500	18	88	16+-0.5
700	24	87	16+-0.5

16 mm Stack Height Friction Hinges. Light Duty

Feature

- Available in SS201 Stainless with low corrosion resistant
- Preferred for Aluminium/uPVC/Timber windows
- Application - Light duty, Side hung
- Stack height -16mm with 2.5mm link thickness
- Universal Type

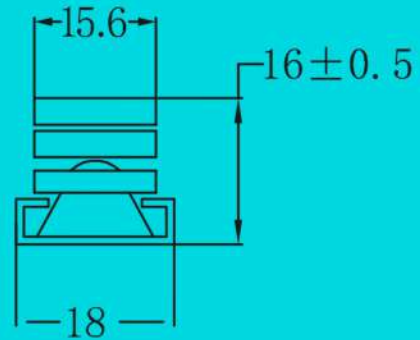

Code	Window Type	Applicaton	Steel Grade	Length(A) (inch/mm)	Max Vent Height(mm)
FHLDSH63	Side Hung	Aluminium / uPVC / Timber Window	SS201	207.0	1500
FHLDSH64	Side Hung	Aluminium / uPVC / Timber Window	SS201	267.0	1500
FHLDSH65	Side Hung	Aluminium / uPVC / Timber Window	SS201	309.0	1500
FHLDSH66	Side Hung	Aluminium / uPVC / Timber Window	SS201	360.0	1500
FHLDSH67	Side Hung	Aluminium / uPVC / Timber Window	SS201	400.0	1500




Max Vent Width(mm)	Max Vent Weight(mm)	Opening Angle	Stack Ht. (mm)
350	12	88	16+-0.5
500	18	88	16+-0.5
600	20	88	16+-0.5
700	23	88	16+-0.5
750	25	88	16+-0.5



16 mm Stack Height Friction Hinges. Light Duty


Feature

- Available in higher corrosion-resistant SS304 Stainless Steel
- Preferred for Aluminium/uPVC Timber windows
- Application - Heavy duty, Top hung
- Stack height - 16mm

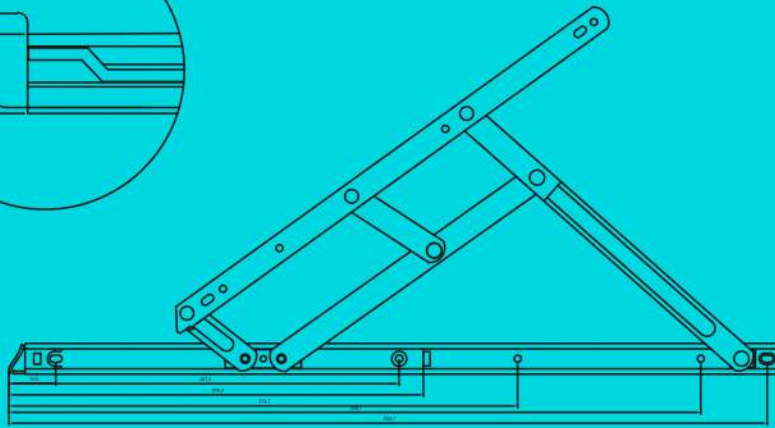


Code	Window Type	Applicaton	Steel Grade	Length(A) (inch/mm)	Max Vent Height(mm)
FHHDTH68	Top Hung	Aluminium/uPVC/Timber Window	SS304	553.0	1300
FHHDTH69	Top Hung	Aluminium/uPVC/Timber Window	SS304	650.0	1800

Max Vent Widht(mm)	Max Vent Weight(kg)	Opening Angle*	Stack Ht. mm
1200	70	45	16+-0.5
1200	90	23	16+-0.5

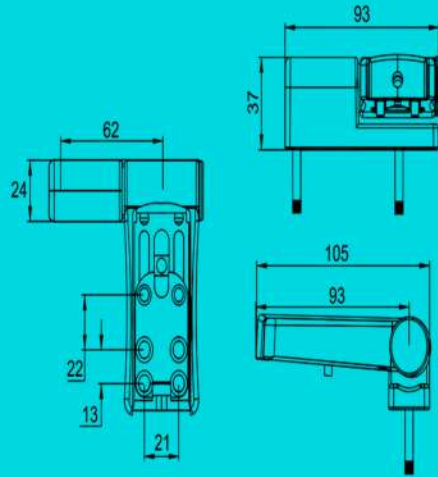


Code : 3DAH70

- Can be used up to 120kg sash weight
- Side hung window and door
- Suitable for outward opening door
- Universal profile compatibility
- Can be adjusted in three dimensions for better assembly functions




Code : WH2D71

- Can be used up to 60 kg sash weight
- Side hung window and door
- Suitable for outward opening windows
- Universal profile compatibility

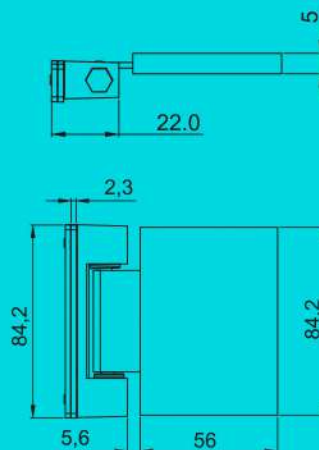
**Code : WH2DFT72**

- Slot free installation
- Face fixed easy installation
- Comaptible with most profiles
- Supplied with packers to fit all profile system
- Key material M.S. & Zinc.

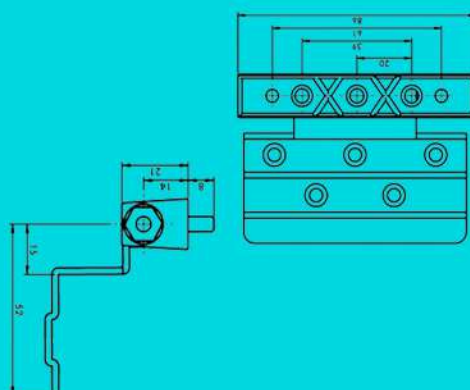

Code : WSHCW73


- Description Shear Hinge-Groove
- Uses Casement Door & Window
- Zamak Alloy & Carbon Steel Material
- Electroplated Corrosion Resistance Finish
- Available in White, Brown

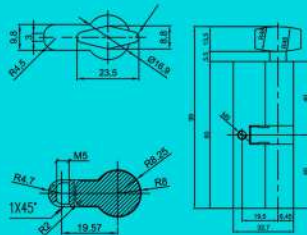

Knob Cylinder (One side Knob & Other Side Key) Code : KCOSK74

Feature


- Cylinder length: 80mm, with latch halfway through
- Standard cylinder that suits most profile depths
- One side key cylinder and one side knob Cylinder

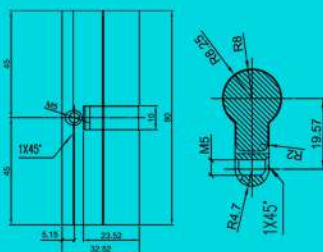

Double Cylinder (Both Side Key) Code : DCBSK75

Feature


- Cylinder length: 90mm, with latch halfway trough
- Standard cylinder that suits most profile depths
- Both side key cylinder

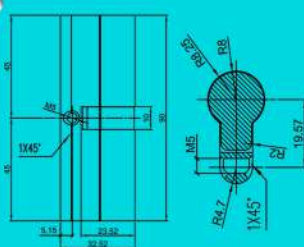

Double Cylinder (Both Side Key) Code : DCBSK76

Feature


- Cylinder length: 60mm, with latch halfway through
- Standard cylinder that suits most profile depths
- Both side key cylinder

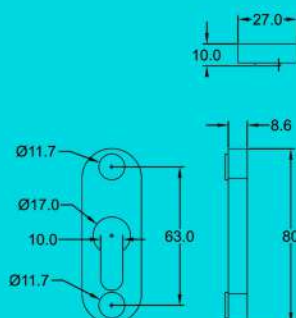


Cylinder Cover Code: CC77

Feature


- Covers the cylinders
- 27x20x79mm (WxDxL)

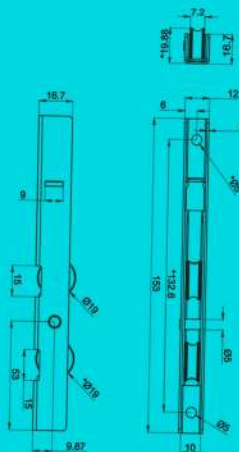


- Adjustable double roller
- Capacity-90 kg for two rollers
- Compatible with all standard profiles
- Material-SS 304, polymer wheel
- Dimensions-12x24x153mm (WxDxL)
- Adjustable from 19 mm to 24 mm

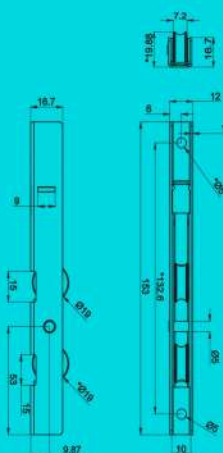

- Adjustable double roller
- Capacity-90 kg for two rollers
- Compatible with all standard profiles
- Material- Galvanized steel & SS 304, polymer wheel
- Dimensions-12x24x153mm (WxDxL)
- Adjustable from 19 mm to 24 mm

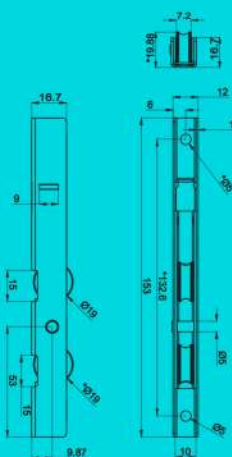

- Adjustable double roller
Capacity-90 kg for two rollers
- Compatible with all standard profiles
- Material-Galvanized steel & S.S. 304,
polymer wheel
- Dimensions-12x20x160mm (WxDxL)
- Adjustable from 21 mm to 27 mm

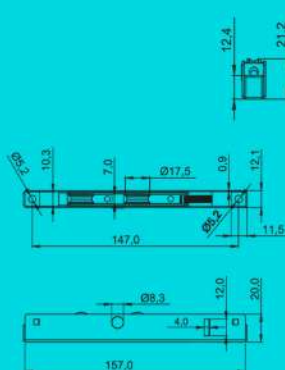

- Adjustable double roller
- Capacity 90 kg for two rollers
- Compatible with all standard profiles
- Material carbon steel zinc plated & polymer wheel
- Dimensions: 12x20x159 mm (WxDxL)
- Adjustable from 20 to 26 mm



- Adjustable four wheel roller
- Capacity 110 kg for two rollers
- Compatible with all standard profiles
- Material carbon steel zinc plated & polymer wheel
- Dimensions: 12x20x201 mm (WxDxL)
- Adjustable from 20 to 26 mm




- Fits all Euro-Groove and non Euro-Groove profiles
- Capacity-40 kg
- Dimensions -16 x 14mm (WxL)
- Material- Zamak casted body & polymer wheel
- High-quality needle/ball bearing
- Noiseless operation



- Fits all Euro-Groove and non Euro-Groove profiles
- Capacity-40 kg
- Dimensions -16 x 12.8mm (WxL)
- Material- A Grade zinc alloy & polymer wheel
- High-quality needle/ball bearing
- Noiseless operation




- Fits all Euro-Groove and non Euro-Groove profiles
- Capacity-40 kg
- Dimensions -16 x 16mm (WxL)
- Material- Zamak casted body & polymer wheel
- High-quality needle/ball bearing
- Noiseless operation

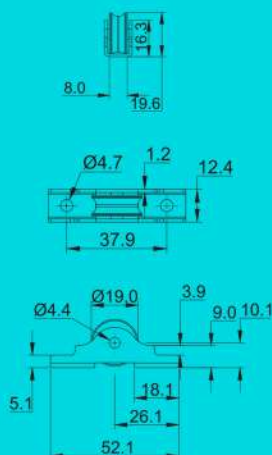

Single Roller With Groove 16(W) x 19.2(H) Code : SRWG86

Feature


- Grooved wheel roller fits all euro groove and non-euro groove profiles
- Capacity: 60 kg.
- Dimension: 16 x 19.2
- Material: SS 304 Body & polymer wheel
- High quality needle ball bearing
- Noiseless operation

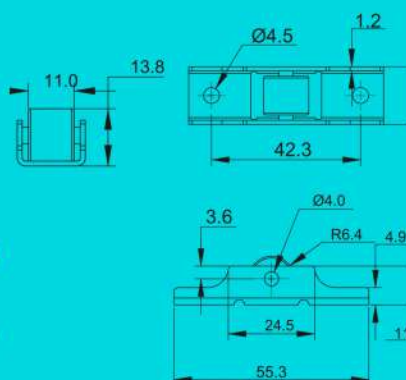

Single Roller Flat Type 16(W) x 13.4(H) Code : SRFT87

Feature


- Flat wheel roller fits all euro groove and non-euro groove profiles
- Capacity: 40 kg.
- Dimension 16 x 13.4
- Material: SS 304 Body & polymer wheel
- High quality needle/ball bearing
- Noiseless operation

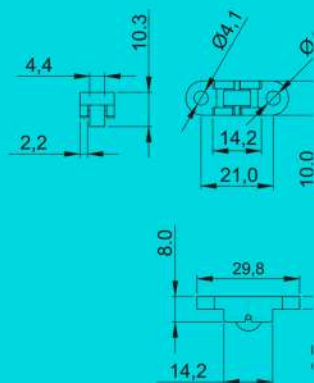

Mesh Roller Plastic Code : MRP88

Feature


- Flat wheel roller fits almost every mesh shutter profile
- Capacity: 8 kg.
- Dimension 10 x 10.5
- Material: Polymer body & steel wheel
- Noiseless operation

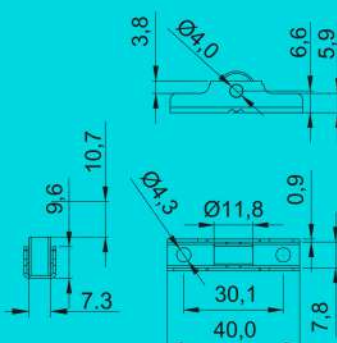

Mesh Roller SS Code : MRSS89


Feature

- Grooved wheel roller fits almost every mesh shutter profile
- Capacity: 10 kg.
- Dimension: 10 x 12.5
- Material: Carbon steel chrome plate & polymer wheel
- Noiseless operation

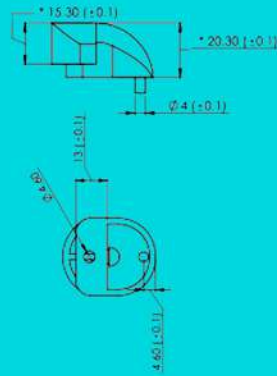


Feature

- 

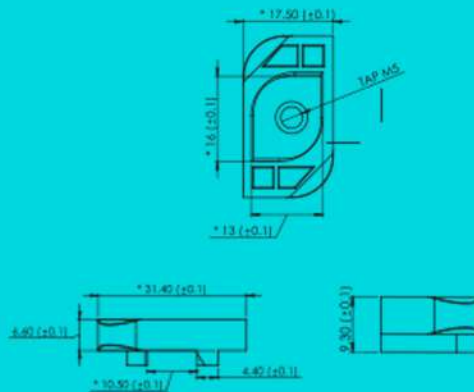


Feature

- 

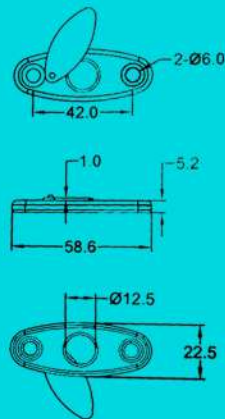


Feature

-

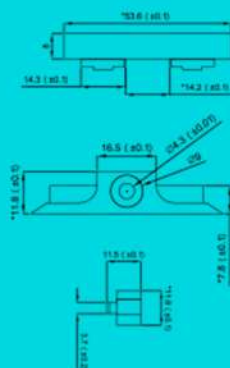

Feature


- 29

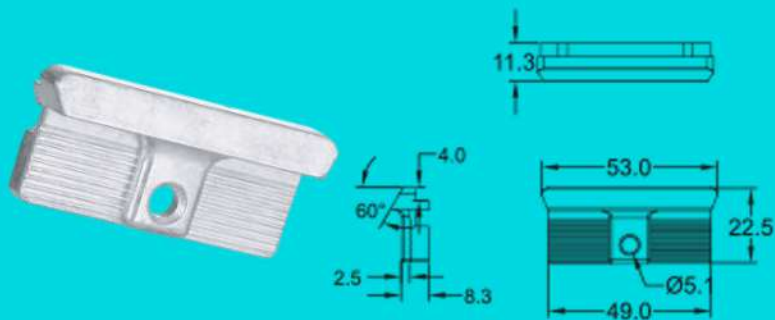

Universal Striker
Code : USRC94

Feature


- Robust Design With A grade material
- Compatible With all standard profiles
- Higher Corrosion resistance

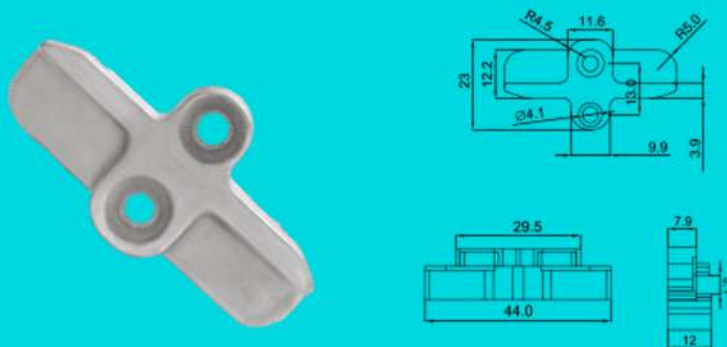

Universal Striker
Code : USRC95

Feature

- Robust Design With A grade material
- Compatible With all standard profiles
- Higher Corrosion resistance

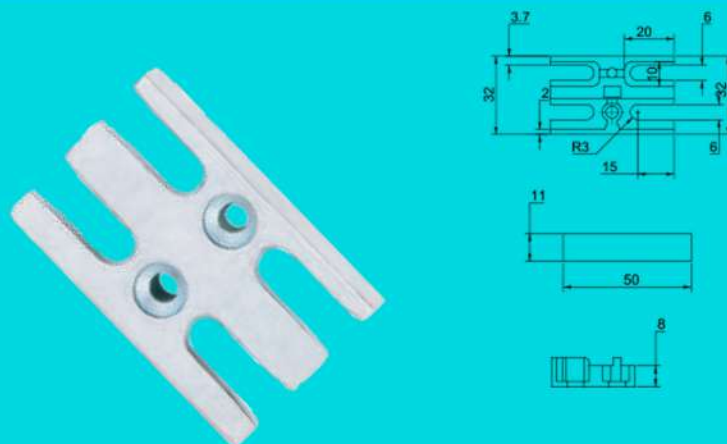

Universal Striker
Code : USRC96

Feature


- Robust Design With A grade material
- Compatible With all standard profiles
- Higher Corrosion resistance



Universal Striker (Step Striker)
Code : USRC97

Feature

- Robust Design With A grade material
- Compatible With all standard profiles
- Higher Corrosion resistance

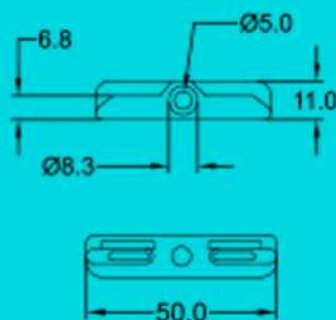


Universal Striker

Code : USRC98

Feature

- Robust Design With A grade material
- Compatible With all standard profiles
- Higher Corrosion resistance

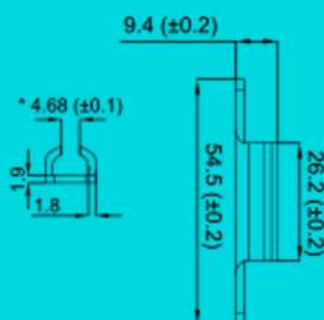


Striker (Silver)

(With Countersunk Holes)

Code : SSWCH99

Feature

- Compatible with all Standard Profiles
- Higher corrosin resistance
- Comes with countersunk holes for flaxtion
- Material - Galvanised Steel
- dimensions - 13x9.5x54.5 mm (WxHxL)

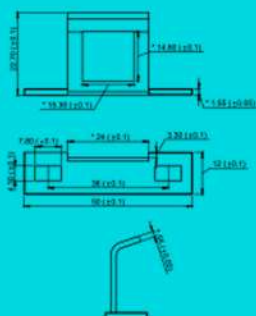


Hook for touch lock in MS

Code : HFTL100

Feature

- To be used with touch lock

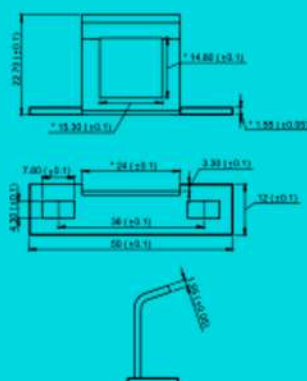


Hook for touch lock in SS

Code : HFTL101

Feature


- To be used with touch lock

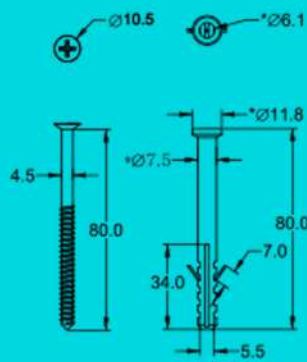

**Screw with
plastic sleeve (8 x 80)**
Code :SWPS102

Feature


- Used for the Fixing of framers for the doors and Windows.
- Dimensions #8x80 mm (Head x Length)

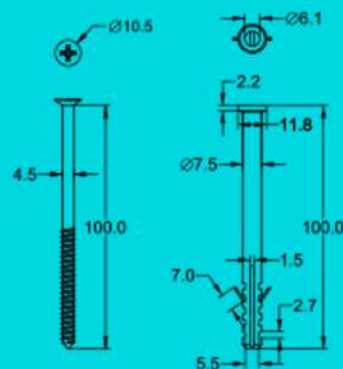

**Screw with
plastic sleeve (8 x 100)**
Code : SWPS103

Feature


- Used for the Fixing of framers for the doors and Windows.
- Dimensions #8x100 mm (Head x Length)

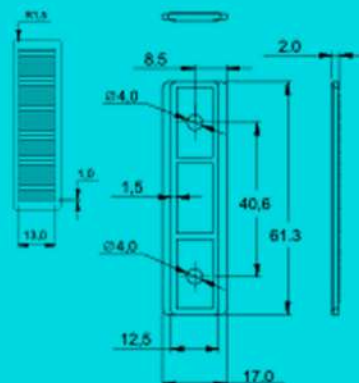

Glass Packer 2 mm
Code : SSWCH104

Feature


- Used for supporting the glass on Sash/ frame.
- Comes in different thickness.
- Combinations of the glass packers can be used to achieve desired thickness

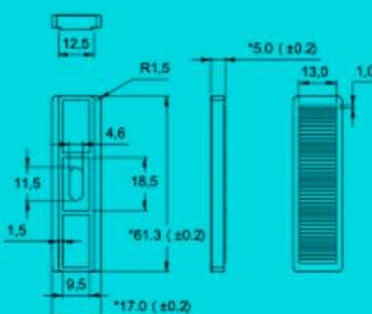

Glass Packer 5 mm
Code : SSWCH105

Feature


- Used for supporting the glass on Sash/ frame.
- Comes in different thickness.
- Combinations of the glass packers can be used to achieve desired thickness

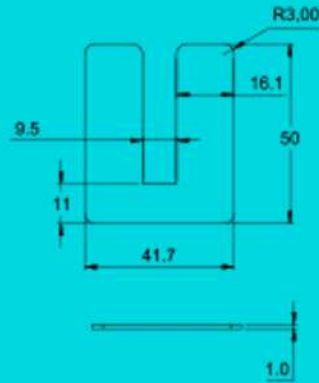

U Packer 1 mm
Code : UPGP 106

Feature


- Used for Levelling the framers during installation
- Comes in different thickness.
- Combinations of the glass packers can be used to achieve desired thickness

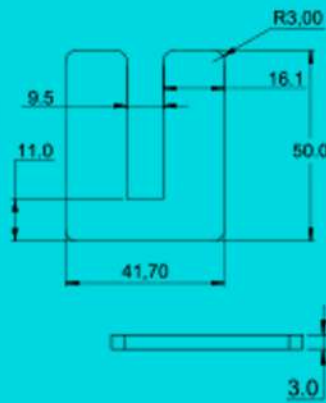

U Packer 3 mm
Code : UPGP 107

Feature

- Used for Levelling the framers during installation
- Comes in different thickness.
- Combinations of the glass packers can be used to achieve desired thickness

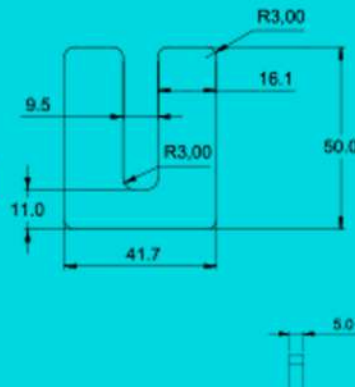

U Packer 5 mm
Code : UPGP 108

Feature

- Used for Levelling the framers during installation
- Comes in different thickness.
- Combinations of the glass packers can be used to achieve desired thickness

Wool Pile

Code : WPMLD109

Feature

- Sealing against air, moisture, light, dust and pests.
- Acts as substantial noise insulation
- Compatible with all standard profiles.
- Easier to install into window and door frames.
- Dimensions: 7x5 mm (WxD).




Wool Pile

Code : WPMLD110

Feature

- Sealing against air, moisture, light, dust and pests.
- Acts as substantial noise insulation
- Compatible with all standard profiles.
- Easier to install into window and door frames.
- Dimensions: 5x6 mm (WxD).

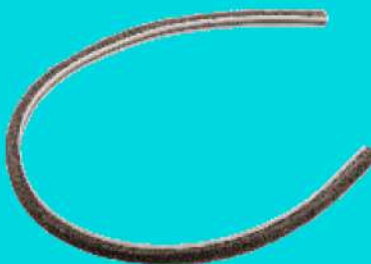


Wool Pile

Code : WPMLD111

Feature

- Sealing against air, moisture, light, dust and pests.
- Acts as substantial noise insulation
- Compatible with all standard profiles.
- Easier to install into window and door frames.
- Dimensions: 6x6 mm (WxD).

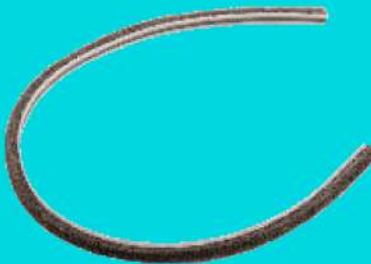

Wool Pile

Code : WPMLD112

Feature

- Sealing against air, moisture, light, dust and pests.
- Acts as substantial noise insulation
- Compatible with all standard profiles.
- Easier to install into window and door frames.
- Dimensions: 7x6 mm (WxD).





SB-113 Shoot Bolt



**MJ-114
Mechanical Joiner**



**SBHP-115
Seal Bridge for Halo Profile**



**DC-116
Drainage Cap**



**FC-117
Fastener Cap**

UPVC Casement Window

Code : CW118

Specification

Window Height / Width - As Per Customer Specification

Color - All Color

Frame Material - UPVC

Glass Type - Toughened & Non Toughened



UPVC Fixed Window

Code : FW119

Specification

Window Height / Width - As Per Customer Specification

Color - All Color

Frame Material - UPVC

Glass Type - Toughened & Non Toughened



UPVC Sliding Window

Code : SW120

Specification

Window Height / Width - As Per Customer Specification

Color - All Color

Frame Material - UPVC

Glass Type - Toughened & Non Toughened



UPVC Tilt & Turn Window

Code : T&TW121

Specification

Window Height / Width - As Per Customer Specification

Color - All Color

Frame Material - UPVC

Glass Type - Toughened & Non Toughened





Avanti Hardware Private Limited